




13B



12

2 @ 759.999 2 blocks per rail



2 per rail

15

5mm X 20mm (~3/4")


socket head, lock washer, washer (8)

15



Note: #10 lock washers are equivalent to 5mm lock washers.

Note: Let the rail assembly slack go against the bottom of the T-slot on both rails.



12



13



15

PARTS LIST FOR Y AXIS:

0 RAILS, 4 REQ. 2 X AND 2 Y, BOTTOM MOUNT 30" X 20mm - RODS, 2 REQ., Z, 10" X 1/2" PURCHASE




Rod

2 @ 1166.399 mm 2 blocks per rail


Y LEAD SCREW, 2 REQ. - 16mm

2 @ 1329.182 mm

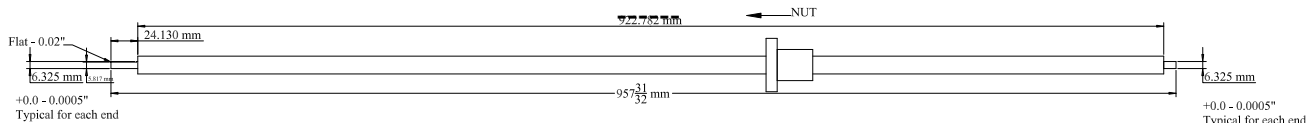

X LEAD SCREW, 16mm

2 @ 884.231 mm



Z LEAD SCREW, 16mm

1 @ 250.424

